

# K.CACTUS FLOORING

Haining Boyu Mutong Decoration Material Co.,Ltd

**COLORFUL FLOORS & HEALTHY LIFE**

**LVT/WPC/SPC FLOOR**

**OAK/BIRCH/MAPLE/WALNUT**

**STONE/CARPET**

**RESISTANT TO SCRATCHES, MARKS, AND STAINS**

FLOOR DESIGNED TO MEET TODAY'S DEMANDS

NOT ONLY BEAUTIFUL BUT ALSO EASY TO KEEP CLEAN

THE MOST TRUSTED FLOORING SUPPLIERS IN THE BUSINESS

MYRIAD OF POSSIBILITIES TO HELP TRANSFORM YOUR HOUSE



K.CACTUS



[www.myvinylfloor.com](http://www.myvinylfloor.com)

 [vinylfloor@outlook.com](mailto:vinylfloor@outlook.com)

 +86 18668314831

 [www.myvinylfloor.com](http://www.myvinylfloor.com)

 Room 2409, No. 238, West Qianjiang Road, Guang Long Wealth Center,  
Haining City, Zhejiang Province, China, 314499



- ✓ UV Resistant
- ✓ Scratch Resistant
- ✓ Stain Resistant
- ✓ Hypoallergenic
- ✓ Mildew Resistant
- ✓ Fire Resistant
- ✓ Slip Resistant
- ✓ Fade Resistant
- ✓ Non-Toxic



Helps protect against stains, scuffs & scratches



Resists rips, tear & more



Easy to clean= more time to enjoy your life



Water-resistant-perfect for any room

## AWESOME COLLECTIONS ON OUR FLOORS

transform any room with gorgeously realistic and durable designs



### 1. Dry Backing (Glue Down Vinyl Plank)

Glue down PVC plank floor thickness from 1.5-3.0

### 2. Vinyl Locking (Click System)

Unilin easy locking system Plus German & Japanese brand slotting machines to ensure quality.

### 3. Loose Lay

No glue or adhesives necessary, No locking system required, No special tools needed for installation. Simply lay it down to transform any room instantly and dramatically

### 4. WPC Floor (Wood Plastic Composite)

Composite vinyl floor combines the resilience of LVT and stability of wood composite core with Unilin click system.

### 5. SPC Floor (Rigid Core Products)


Newest technology on Rigid core greatly enhances the floor' stability performance which then allows under floor heating application.

### 6. SPC Floor Plus


Upgrade manufacturing technique composites SPC rigid core between two LVT layers to enhance the soft touch.

## Dry Backing (Glue Down Vinyl Plank)

Realistic design inspired by nature featuring high definition printing and realistic color

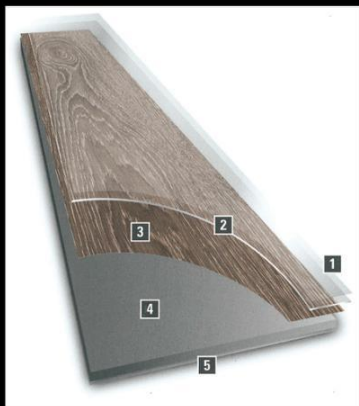

- 1 UV Coating** : protects the product and enables easy cleaning and care.
- 2 Wear layer** : guarantees high durability and allows versatile application installations.
- 3 Decor film** : offers multiple and unique product designs.
- 4 Base layer** : Increases elasticity and stability for a soft touch.
- 5 Backing** : Helps with balance and optimal installation with a waffle-backing texture.

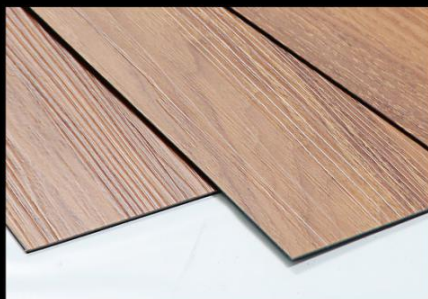


LVT-Dry Backing			
Size		Thickness(mm)	Wear Layer(mm)
6''*36''	152.4mm*914.4mm	1.5mm 2.0mm 3.0mm	0.1mm 0.2mm 0.3mm
7''*48''	177.8mm*1219.2mm		
12''*12''	304.8mm*304.8mm		
24''*24''	609.6mm*609.6mm		

## Vinyl Locking (Click System)

Premium construction includes two core layers of virgin PVC and a fiberglass inner-layer, all topped with a durable wear layer and UV surface finish. Locking system is precision engineered with the most advanced technology possible to ensure connecting quality.



- 1 UV Coating** : protects the product and enables easy cleaning and care.
- 2 Wear layer** : guarantees high durability and allows versatile application installations.
- 3 Decor film** : offers multiple and unique product designs.
- 4 Base layer with fiberglass** : Improves product stability and increases strength while offering optimal indentation characteristics.
- 5 Backing** : compensates for tension and allows for increased stability.
- 6 Click system** : Allows easy and quick installation without glue.




**Locking System**



LVT-Click System			
Size		Thickness(mm)	Wear Layer(mm)
6''*36''	152.4mm*914.4mm	4mm 5mm	0.3mm
7''*48''	177.8mm*1219.2mm		0.5mm
			0.7mm

## Loose Lay

Loose Lay Vinyl Planks install easily over most existing hard floors with minimal or no adhesives. These beautifully embossed vinyl planks have a slightly varied pattern for a genuine hard-wood floor appearance.

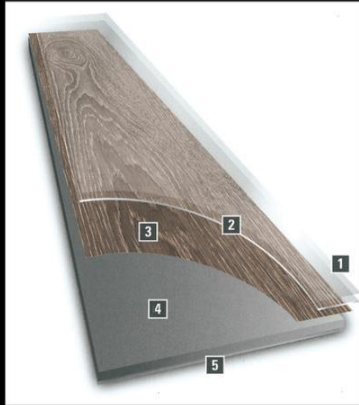

- 1 **UV Coating** : protects the product and enables easy cleaning and care.
- 2 **Wear layer** : guarantees high durability and allows versatile application installations.
- 3 **Decor film** : offers multiple and unique product designs.
- 4 **Base layer with fibreglass** : Improves product stability and increases strength while offering optimal indentation characteristics.
- 5 **Backing** : Helps with balance and optimal installation with a waffle-backing texture.
- 6 **Slipless film** : minimizes risk of slipping even with wet surfaces.

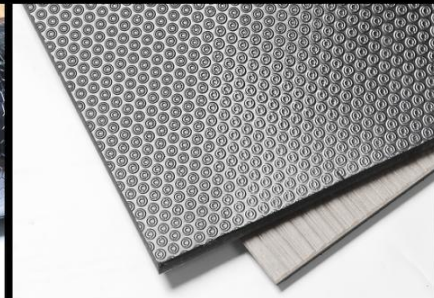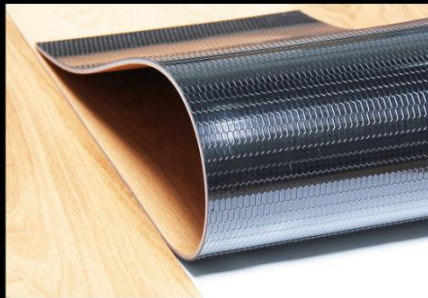


LVT-Loose Lay		
Size	Thickness(mm)	Wear Layer(mm)
189mm*1229mm	5.0mm 6.0mm	0.3mm 0.5mm

## WPC Floor (Wood Plastic Composite)

Composite vinyl floor combines the resilience of LVT and stability of wood composite core with Unilin click system.



- 1 **UV Coating** : protects the product and enables easy cleaning and care.
- 2 **Decor film with wear layer** : guarantees high durability and allows versatile application installations.
- 3 **PVC layer** : Improves product stability and increases strength while offering optimal indentation characteristics.
- 4 **WPC layer** : provides a waterproof barrier and increases product strength.
- 5 **Click system** : Allows easy and quick installation without glue.

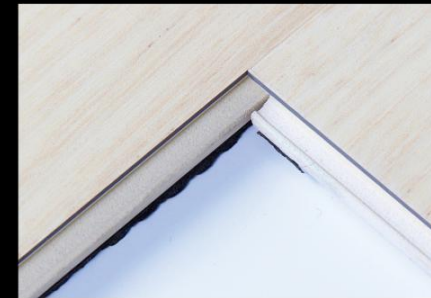

WPC-Click System			
Size		Thickness(mm)	Wear Layer(mm)
6''*36''	152.4mm*914.4mm	5.5mm,6.0mm 6.5mm,7.0mm	0.3mm 0.5mm
7''*48''	180mm*1220mm		

## o New SPC Floor Series

### What is SPC flooring ?

**SPC Flooring** is the newest generation of floorcovering featuring: enhanced stability, high performance, 100% waterproof, high-density solid core, and indentation resistance. SPC can be easily installed on a variety of floor bases including concrete or existing vinyl flooring. SPC is completely formaldehyde-free and uses components safe for residential and commercial installations.



**SPC Flooring**, also known as Rigid Core LVT, is an upgrade and improvement of traditional Luxury Vinyl Tile (LVT). The primary components of SPC are natural limestone powder, polyvinyl chloride, and a stabilizer. The proper ratios result in a stable, rigid composite material.

### Advantages :

- 1) High-density rigid core for increased strength compared to traditional LVT flooring,
- 2) 100% waterproof, fire-retardant, and easily installed over existing flooring.
- 3) Extreme stability, with only minor expansion/shrinking (0.01%) compared to LVT, WPC, or Laminate flooring,
- 4) No curling even in high-temperature environments.
- 5) Glue-free installation with improved click-and-lock system.
- 6) Safe and sustainable by eliminating formaldehyde.
- 7) Best-in-class indentation resistance.

## Underlayment Introduction o



### Cork

This underlayment is made of natural cork, it feels soft and warm underfoot.



### Nonwoven

This underlayment is incredibly beautiful and durable, it's supreme antislip.



### PVC

This underlayment makes more perfect flooring performance, it's more durable.



### IXPE/EVA Foam

This underlayment offers good foot feeling and anti-noise, it's also 100% waterproof.

### Extensive application

Home | Hotel | School | Hospital | Mall | Office building





**Embossed**



o Wood grain



o Deep embossed



o Handscratch




o Peel Grain / Lychee Grain / leather Grain



o Register



o Crystal



**Reducer**

STYLE: match 6.5mm/8mm floor  
 CARTON SIZE: 2420\*125\*85mm  
 WEIGHT KGS/PC: 0.58kgs/pc  
 SIZE/PC : 2400\*45\*8mm  
 PACKING (PCS/CTN): 25




**Flush Stairnose**

STYLE: match 6.5mm/8mm floor  
 SIZE/PC : 2400\*75\*25mm  
 CARTON SIZE: 2420\*165\*85mm  
 PACKING (PCS/CTN): 10  
 WEIGHT KGS/PC: 1.45kgs/pc




**Stairnose Overlap**

STYLE: match 6.5mm/8mm floor  
 SIZE/PC : 2400\*55\*18mm  
 CARTON SIZE: 2420\*125\*65mm  
 PACKING (PCS/CTN): 10  
 WEIGHT KGS/PC: 1.1kgs/pc




**Skirting**

STYLE: match 6.5mm/8mm floor  
 SIZE/PC : 2400\*80\*12mm  
 CARTON SIZE: 2420\*165\*85mm  
 PACKING (PCS/CTN): 10  
 WEIGHT KGS/PC: 1.5kgs/pc




**T-moldong**

STYLE: match 6.5mm/8mm floor  
 SIZE/PC : 2400\*45\*8mm  
 CARTON SIZE: 2420\*125\*85mm  
 PACKING (PCS/CTN): 25  
 WEIGHT KGS/PC: 0.5kgs/pc



**End-cap**

STYLE: match 6.5mm/8mm floor  
 SIZE/PC : 2400\*35\*10mm  
 CARTON SIZE: 2420\*125\*85mm  
 PACKING (PCS/CTN): 25  
 WEIGHT KGS/PC: 0.54kgs/pc




**Quarter round**

STYLE: match 6.5mm/8mm floor  
 SIZE/PC : 2400\*25\*15mm  
 CARTON SIZE: 2420\*125\*85mm  
 PACKING (PCS/CTN): 25  
 WEIGHT KGS/PC: 0.45kgs/pc

Accessories are  
**SPC and WPC materials**



BY 8001

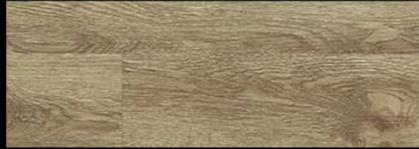

BY 8002



BY 8003



BYS8001



BYS8002



BYW1001



BYW1002



BYW1003



BYW1007



BYS3005



BYS3006



BYS8003



BYS3010



BYS3007



BYS3011



BY8026



BYG1009

These printed patterns can be different from real products in colors and texture. Samples will also be provided for your evaluation.



BYG1001



BYG1002



BYG1003



BYG1004



BYG1005



BYG1006



BYG1007




BYG1008


These printed patterns can be different from real products in colors and texture. Samples will also be provided for your evaluation.



o Stone Color Favors

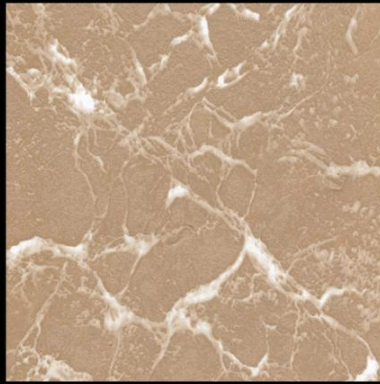

SJB016-1

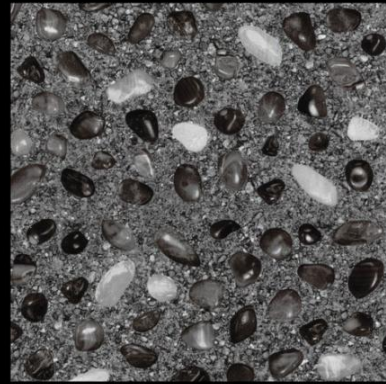

SJB058-1




SJB121



SJB191-2




Stone Color Favors o




SJB001-4




SJB003-1




SJB004-4




SJB016



SJB017



SJB058



SJB058-5




SJB149-7



SJB183-1

These printed patterns can be different from real products in colors and texture. Samples will also be provided for your evaluation.

o Carpet Color Favors

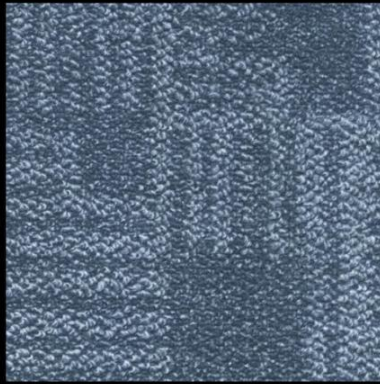


SJH007



SJH022-1




SJH080

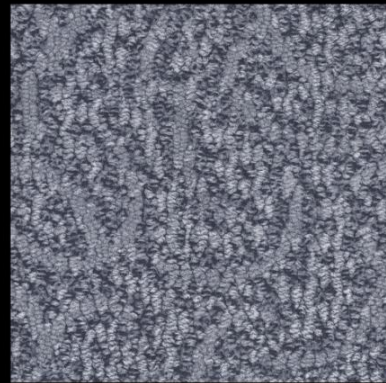

SJH150-4




Carpet Color Favorso



SJH001



SJH007-1




GHA74-03




SJH022



SJH028-3



SJH032-4



SJH032-4




SJH079



SJH095-2

These printed patterns can be different from real products in colors and texture. Samples will also be provided for your evaluation.

## UNDERLAY DISPLAY

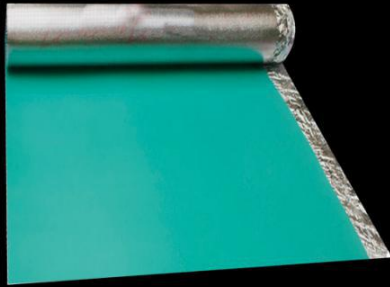


Material: IXPE+AL  
 Size: 1.0m\*100m  
 Thickness: 2.0mm  
 MOQ: 3000sqm


THICKNESS



ALUMINUM



IXPE

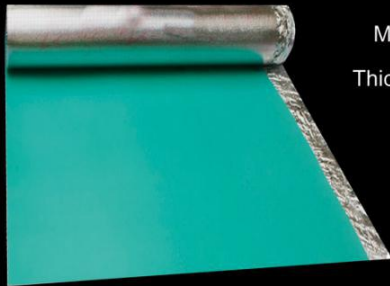


Material: IXPE+AL  
 Size: 1.1m\*100ft/200ft  
 Thickness: 2.0mm  
 MOQ: 1000sqm

THICKNESS



ALUMINUM



IXPE



Material: IXPE+PE/AL  
 Size: 1.0m\*100m  
 Thickness: 2.0mm  
 MOQ: 5000sqm

THICKNESS




ALUMINUM




IXPE




## ADVANTAGES OF UNDERLAY




sound absorption




waterproof



soft and comfortable



great damping performance



flat and even surface



ground heating exclusive